

# *BLUE GIANT*®

## IN-PLANT LIFT TABLES for every application



SCISSOR LIFT TABLES | TILTERS AND UPENDERS | TURN TABLES

# CONTENTS

## Scissor Lift Tables

Standard Duty Scissor .....	1
Wide Base Scissor .....	2
Double Wide Scissor .....	3
Tandem Long Scissor .....	4
Double Scissor .....	5
Zero Ground Level Scissor .....	6
Pneumatic Scissor .....	7

## Tilters and Upenders

Hydraulic Tilters .....	8
Wide Base Hydraulic Tilters .....	9
Upenders .....	10
Pneumatic Tilt .....	11

<b>Turn Tables .....</b>	<b>12</b>
--------------------------	-----------

# Standard Duty Scissor

Blue Giant Standard Duty Series Scissor Lift Tables are economical, have a heavy-duty design, and are built to improve operator ergonomics and enhance productivity. With vertical travel ranges from 24" (610 mm) to 60" (1,524 mm) and lifting capacities of up to 6,000 lb (2,721 kg), these units will meet all of your application requirements.

## FEATURES

- Heavy-duty cylinders
- Heavy-duty steel legs
- Internal power units
- Lifetime lubricated bearings
- Safety hinged maintenance blocks
- Standard hand controls

## OPTIONS

- Accordion skirts
- Conveyor
- Electric toe guards
- External power unit
- Foot pedal control
- High cycle
- Oversized platform
- PLC controlled
- Platform with beveled edges
- Portability package
- Tilt table mounted to lift
- Travel limit switch
- Turn table mounted to lift



## SPECIFICATIONS

Model Number	Load Capacity	Lowered Height	Raised Height	Standard Platform	Maximum Platform	Standard Motor	Weight
<b>LFT24 SERIES – 24" TRAVEL</b>							
LFT24-20	2,000 lb (907 kg)	7.5" (191 mm)	31.5" (800 mm)	24" x 36" (610 x 914 mm)	48" x 60" (1,219 x 1,524 mm)	1 HP	550 lb (249 kg)
LFT24-40	4,000 lb (1,814 kg)			36" x 36" (914 x 914 mm)			570 lb (259 kg)
LFT24-60	6,000 lb (2,721 kg)			2 HP*		620 lb (281 kg)	
<b>LFT36 SERIES – 36" TRAVEL</b>							
LFT36-20	2,000 lb (907 kg)	7.5" (191 mm)	43.5" (1,105 mm)	24" x 48" (610 x 1,219 mm)	48" x 72" (1,219 x 1,829 mm)	1 HP	690 lb (313 kg)
LFT36-40	4,000 lb (1,814 kg)			36" x 48" (914 x 1,219 mm)			750 lb (340 kg)
LFT36-60	6,000 lb (2,721 kg)			2 HP*		790 lb (358 kg)	
<b>LFT48 SERIES – 48" TRAVEL</b>							
LFT48-20	2,000 lb (907 kg)	7.5" (191 mm)	55.5" (1,410 mm)	24" x 64" (610 x 1,626 mm)	48" x 96" (1,219 x 2,438 mm)	1 HP	850 lb (386 kg)
LFT48-40	4,000 lb (1,814 kg)			36" x 64" (914 x 1,626 mm)			900 lb (408 kg)
LFT48-60	6,000 lb (2,721 kg)			2 HP*		950 lb (431 kg)	
<b>LFT60 SERIES – 60" TRAVEL</b>							
LFT60-20	2,000 lb (907 kg)	10" (254 mm)	70" (1,778 mm)	24" x 88" (610 x 2,235 mm)	48" x 120" (1,219 x 3,048 mm)	1 HP	1,300 lb (590 kg)
LFT60-40	4,000 lb (1,814 kg)			36" x 88" (914 x 2,235 mm)			1,375 lb (624 kg)
LFT60-60	6,000 lb (2,721 kg)			2 HP*		1,450 lb (658 kg)	

\*6,000 lb units come standard with external power unit.

# Wide Base Scissor

Blue Giant Wide Base Series Scissor Lift Tables are cost-effective and ergonomically designed to meet all your application requirements. The wide base provides enhanced stability and support to handle larger loads of up to 6,000 lb (2,721 kg).

## FEATURES

- Heavy-duty cylinders
- Heavy-duty steel legs
- Internal power units
- Lifetime lubricated bearings
- Safety hinged maintenance blocks
- Standard hand controls

## OPTIONS

- Accordion skirts
- Conveyor
- External power unit
- Electric toe guards
- Foot pedal control
- High cycle
- Oversized platform
- PLC controlled
- Platform with beveled edges
- Portability package
- Tilt table mounted to lift
- Travel limit switch
- Turn table mounted to lift



## SPECIFICATIONS

Model Number	Load Capacity	Lowered Height	Raised Height	Standard Platform	Maximum Platform	Standard Motor	Weight
<b>LFTWB24 SERIES – 24" TRAVEL</b>							
LFTWB24-20	2,000 lb (907 kg)	7.5" (191 mm)	31.5" (800 mm)	36" x 36" (914 x 914 mm)	60" x 60" (1,524 x 1,524 mm)	1 HP	720 lb (327 kg)
LFTWB24-40	4,000 lb (1,814 kg)						740 lb (336 kg)
LFTWB24-60	6,000 lb (2,721 kg)					2 HP*	790 lb (358 kg)
<b>LFTWB36 SERIES – 36" TRAVEL</b>							
LFTWB36-20	2,000 lb (907 kg)	7.5" (191 mm)	43.5" (1,105 mm)	36" x 48" (914 x 1,219 mm)	60" x 72" (1,524 x 1,829 mm)	1 HP	860 lb (390 kg)
LFTWB36-40	4,000 lb (1,814 kg)						900 lb (408 kg)
LFTWB36-60	6,000 lb (2,721 kg)					2 HP*	960 lb (435 kg)
<b>LFTWB48 SERIES – 48" TRAVEL</b>							
LFTWB48-20	2,000 lb (907 kg)	7.5" (191 mm)	55.5" (1,410 mm)	36" x 64" (914 x 1,626 mm)	60" x 96" (1,524 x 2,438 mm)	1 HP	1,020 lb (463 kg)
LFTWB48-40	4,000 lb (1,814 kg)						1,070 lb (485 kg)
LFTWB48-60	6,000 lb (2,721 kg)					2 HP*	1,120 lb (508 kg)
<b>LFTXB36 SERIES – 36" TRAVEL</b>							
LFTXB36-20	2,000 lb (907 kg)	7.5" (191 mm)	43.5" (1,105 mm)	48" x 48" (1,219 x 1,219 mm)	72" x 72" (1,829 x 1,829 mm)	1 HP	950 lb (431 kg)
LFTXB36-40	4,000 lb (1,814 kg)						990 lb (449 kg)
LFTXB36-60	6,000 lb (2,721 kg)					2 HP*	1,050 lb (476 kg)
<b>LFTXB48 SERIES – 48" TRAVEL</b>							
LFTXB48-20	2,000 lb (907 kg)	7.5" (191 mm)	55.5" (1,410 mm)	48" x 64" (1,219 x 1,626 mm)	72" x 96" (1,829 x 2,438 mm)	1 HP	1,110 lb (503 kg)
LFTXB48-40	4,000 lb (1,814 kg)						1,160 lb (526 kg)
LFTXB48-60	6,000 lb (2,721 kg)					2 HP*	1,250 lb (567 kg)
<b>LFTXB60 SERIES – 60" TRAVEL</b>							
LFTXB60-20	2,000 lb (907 kg)	10" (254 mm)	70" (1,778 mm)	56" x 88" (1,422 x 2,235 mm)	84" x 120" (2,134 mm x 3,048 mm)	1 HP	1,650 lb (748 kg)
LFTXB60-40	4,000 lb (1,814 kg)						1,725 lb (782 kg)
LFTXB60-60	6,000 lb (2,721 kg)					2 HP*	1,800 lb (816 kg)

\*6,000 lb units come standard with external power unit.

# Double Wide Scissor

Blue Giant Double Wide Series Scissor Lift Tables provide enhanced load stability and support. It's heavy-duty design allows for higher load capacities ranging from 4,000 lb (1,814 kg) to 12,000 lb (5,443 kg). With vertical travel ranging from 24" to 60" (610 mm x 1,524 mm), these units are built to meet all your application requirements.

## FEATURES

- Heavy-duty cylinders
- Heavy-duty steel legs
- Internal power units
- Lifetime lubricated bearings
- Safety hinged maintenance blocks
- Standard hand controls

## OPTIONS

- Accordion skirts
- Conveyor
- Custom sized platform
- Electric toe guards
- External power unit
- Foot pedal control
- High cycle
- PLC controlled
- Platform with beveled edges
- Portability package
- Tilt table mounted to lift
- Travel limit switch
- Turn table mounted to lift



## SPECIFICATIONS

Model Number	Load Capacity	Lowered Height	Raised Height	Standard Platform	Maximum Platform	Standard Motor	Weight
<b>LFTDW24 SERIES – 24" TRAVEL</b>							
LFTDW24-40	4,000 lb (1,814 kg)	7.5" (191 mm)	31.5" (800 mm)	72" x 36" (1,829 x 914 mm)	72" x 60" (1,829 x 1,524 mm)	1 HP	1,280 lb (581 kg)
LFTDW24-80	8,000 lb (3,629 kg)						1,340 lb (608 kg)
LFTDW24-120	12,000 lb (5,443 kg)					2 HP*	1,400 lb (635 kg)
<b>LFTDW36 SERIES – 36" TRAVEL</b>							
LFTDW36-40	4,000 lb (1,814 kg)	7.5" (191 mm)	43.5" (1,105 mm)	72" x 48" (1,829 x 1,219 mm)	72" x 72" (1,829 x 1,829 mm)	1 HP	1,280 lb (581 kg)
LFTDW36-80	8,000 lb (3,629 kg)						1,340 lb (608 kg)
LFTDW36-120	12,000 lb (5,443 kg)					2 HP*	1,400 lb (635 kg)
<b>LFTDW48 SERIES – 48" TRAVEL</b>							
LFTDW48-40	4,000 lb (1,814 kg)	7.5" (191 mm)	55.5" (1,410 mm)	72" x 64" (1,829 x 1,626 mm)	72" x 96" (1,829 x 2,438 mm)	1 HP	1,600 lb (726 kg)
LFTDW48-80	8,000 lb (3,629 kg)						1,700 lb (771 kg)
LFTDW48-120	12,000 lb (5,443 kg)					2 HP*	1,800 lb (816 kg)
<b>LFTDW60 SERIES – 60" TRAVEL</b>							
LFTDW60-40	4,000 lb (1,814 kg)	10" (254 mm)	70" (1,778 mm)	72" x 88" (1,829 x 2,235 mm)	96" x 120" (2,438 x 3,048 mm)	1 HP	2,500 lb (1,134 kg)
LFTDW60-80	8,000 lb (3,629 kg)						2,650 lb (1,202 kg)
LFTDW60-120	12,000 lb (5,443 kg)					2 HP*	2,750 lb (1,247 kg)

\*12,000 lb units come standard with external power unit.

# Tandem Long Scissor


Blue Giant Tandem Scissor Lift Tables are heavy-duty, hydraulic scissor lift tables for applications requiring longer platform sizes. These lift tables feature a longer length platform to meet the application needs of manufacturing, processing and distribution operations where materials of greater length are being handled.

## FEATURES

- Heavy-duty cylinders
- Heavy-duty steel legs
- Internal power units
- Lifetime lubricated bushings
- Safety hinged maintenance blocks
- Standard hand controls

## OPTIONS

- Accordion skirts
- Conveyor
- Custom sized platform
- Electric toe guards
- External power unit
- Foot pedal control
- High cycle
- PLC controlled
- Platform with beveled edges
- Portability package
- Tilt table mounted to lift
- Travel limit switch
- Turn table mounted to lift

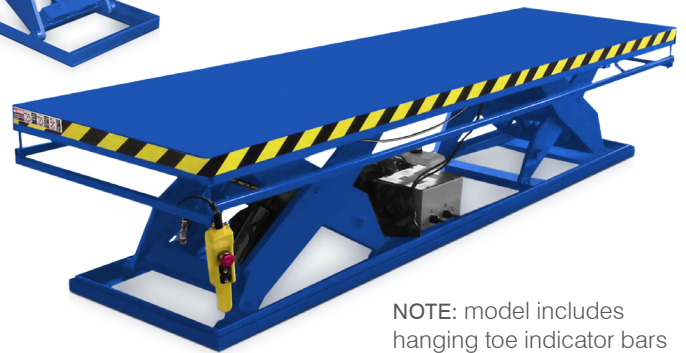

NOTE: model includes hanging toe indicator bars

## SPECIFICATIONS

Model Number	Load Capacity	Lowered Height	Raised Height	Standard Platform	Maximum Platform	Standard Motor	Weight
<b>LFTDL24 SERIES – 24" TRAVEL</b>							
LFTDL24-40	4,000 lb (1,814 kg)	7.5" (191 mm)	31.5" (800 mm)	24" x 72" (610 x 1,829 mm)	48" x 120" (1,219 x 3,048 mm)	1 HP	1,280 lb (581 kg)
LFTDL24-80	8,000 lb (3,629 kg)						1,340 lb (608 kg)
LFTDL24-120	12,000 lb (5,443 kg)			36" x 72" (914 x 1,829 mm)		2 HP*	1,400 lb (635 kg)
<b>LFTDL36 SERIES – 36" TRAVEL</b>							
LFTDL36-40	4,000 lb (1,814 kg)	7.5" (191 mm)	43.5" (1,105 mm)	24" x 96" (610 x 2,438 mm)	48" x 144" (1,219 x 3,658 mm)	1 HP	1,280 lb (581 kg)
LFTDL36-80	8,000 lb (3,629 kg)						1,340 lb (608 kg)
LFTDL36-120	12,000 lb (5,443 kg)			36" x 96" (914 x 2,438 mm)		2 HP*	1,400 lb (635 kg)
<b>LFTDL48 SERIES – 48" TRAVEL</b>							
LFTDL48-40	4,000 lb (1,814 kg)	7.5" (191 mm)	55.5" (1,410 mm)	24" x 128" (610 x 3,251 mm)	48" x 176" (1,219 x 3,251 mm)	1 HP	1,600 lb (726 kg)
LFTDL48-80	8,000 lb (3,629 kg)						1,700 lb (771 kg)
LFTDL48-120	12,000 lb (5,443 kg)			36" x 128" (914 x 3,251 mm)		2 HP*	1,800 lb (816 kg)
<b>LFTDL60 SERIES – 60" TRAVEL</b>							
LFTDL60-40	4,000 lb (1,814 kg)	10" (254 mm)	70" (1,778 mm)	24" x 176" (610 x 4,470 mm)	48" x 220" (1,219 x 5,588 mm)	1 HP	2,500 lb (1,134 kg)
LFTDL60-80	8,000 lb (3,629 kg)						2,650 lb (1,202 kg)
LFTDL60-120	12,000 lb (5,443 kg)			36" x 176" (914 x 4,470 mm)		2 HP*	2,750 lb (1,247 kg)

\*6,000 lb units come standard with external power unit.

# Double Scissor

Blue Giant Double Scissor Lift Tables are a safe and efficient solution for in-plant product storage and transfer. The same high quality construction features found in the stationary elevating docks are incorporated into all scissor lifts. Each lift cylinder is encased in a weather-resistant, all steel housing. Precision velocity fuses on each hydraulic cylinder eliminates platform free-fall. All hard chromed pivot points are fitted with lifetime-lubricated bronze bearings or Teflon™ coated bushings.

## FEATURES

- Heavy duty cylinders
- Heavy duty steel legs
- Hydraulic pump with built-in overload relief
- Push button control on 12' (3,658 mm) straight cord
- Remote power pack 12' (3,658 mm) hydraulic hose
- Scissor lifts can be mounted in a pit or a concrete pad
- Standard hand controls

## OPTIONS

- Accordion safety skirting
- Custom sizes and designs
- Electrical toe guards
- Foot pedal control
- Portability package
- Self-contained or larger HP power packs
- Travel limit switch



## SPECIFICATIONS

Model Number	Load Capacity	Lowered Height	Raised Height	Standard Platform	Maximum Platform	Standard Motor	Weight
<b>DS48 SERIES - 48" TRAVEL</b>							
DS1-48	1,000 lb (454 kg)	12" (305 mm)	60" (1,524 mm)	24" x 48" (610 x 1,219 mm)	48" x 48" (1,219 x 1,219 mm)	3 HP	1,100 lb (499 kg)
DS2-48	2,000 lb (907 kg)						1,125 lb (510 kg)
DS3-48	3,000 lb (1,361 kg)						1,190 lb (540 kg)
DS4-48	4,000 lb (1,814 kg)						1,300 lb (590 kg)
<b>DS60 SERIES - 60" TRAVEL</b>							
DS1-60	1,000 lb (454 kg)	12" (305 mm)	72" (1,829 mm)	24" x 60" (610 x 1,524 mm)	48" x 60" (1,219 x 1,524 mm)	3 HP	1,125 lb (510 kg)
DS2-60	2,000 lb (907 kg)						1,150 lb (522 kg)
DS3-60	3,000 lb (1,361 kg)						1,215 lb (551 kg)
DS4-60	4,000 lb (1,814 kg)						1,325 lb (601 kg)
<b>DS72 SERIES - 72" TRAVEL</b>							
DS1-72	1,000 lb (454 kg)	12" (305 mm)	84" (2,134 mm)	24" x 72" (610 x 1,829 mm)	48" x 72" (1,219 x 1,829 mm)	3 HP	1,285 lb (583 kg)
DS2-72	2,000 lb (907 kg)						1,310 lb (594 kg)
DS3-72	3,000 lb (1,361 kg)						1,395 lb (633 kg)
DS4-72	4,000 lb (1,814 kg)						1,505 lb (683 kg)



# Zero Ground Level Scissor

Blue Giant Zero Ground Level Scissor Lifts are designed for use when powered fork trucks are not available or accessible in a work area. These tables permit floor level loading / unloading access by pallet jacks and other material handling equipment. The front approach edge of the platform is beveled to make loading / unloading of the table an easy operation.

## FEATURES

- External power units
- Heavy-duty cylinders
- Heavy-duty steel legs
- Lifetime lubricated bearings
- Safety maintenance blocks
- Standard hand controls
- 6" (152 mm) flexible safety toe guard



## OPTIONS

- Accordion skirts
- Conveyors
- Foot pedal control
- Oversized platforms
- PLC controlled

## SPECIFICATIONS

Model Number	Load Capacity	Platform Size	Overall Dimensions	Lowered Height	Standard Motor	Weight
<b>ZPL-20 SERIES LIFTS – 36" TRAVEL</b>						
ZPL-20-4448	2,000 lb (907 kg)	44" x 48" (1,118 x 1,219 mm)	72" x 56" (1,829 x 1,422 mm)	3/8" (10 mm)	1 HP	1,300 lb (590 kg)
ZPL-20-5048		50" x 48" (1,270 x 1,219 mm)	74" x 56" (1,880 x 1,422 mm)			1,400 lb (635 kg)
<b>ZPL-40 SERIES LIFTS – 36" TRAVEL</b>						
ZPL-40-4448	4,000 lb (1,814 kg)	44" x 48" (1,118 x 1,219 mm)	72" x 56" (1,829 x 1,422 mm)	1/2" (13 mm)	1 HP	1,325 lb (601 kg)
ZPL-40-5048		50" x 48" (1,270 x 1,219 mm)	74" x 56" (1,880 x 1,422 mm)			1,425 lb (646 kg)



# Pneumatic Scissor

Blue Giant's complete line of heavy-duty industrial Pneumatic Scissor Lift Tables are 100% air actuated and can be used anywhere plant air is available (requires 80 PSI at 15 CFM air supply). These units are ideal in applications where hydraulic equipment (oils and fluids) is prohibited. These units require less maintenance than electric hydraulic units with no direct electrical connections, control boxes, or hydraulic cylinders. The Pneumatic Tables feature 24" (610 mm) vertical travel, 33.5" (851 mm) raised height with 9.5" (241 mm) lowered height.

## FEATURES

- Heavy-duty air spring
- Heavy-duty steel legs
- Lifetime lubricated bearings
- Safety hinged maintenance blocks
- Standard hand controls mounted to pedestal

## OPTIONS

- Accordion skirts
- Conveyor
- Foot pedal control
- Oversized platforms
- Platform with beveled edges
- Portability package
- Tilt tables mounted to lifts
- Turn tables mounted to lifts



## SPECIFICATIONS

Model Number	Load Capacity	Platform Size	Weight
<b>AF24-10 SERIES</b>			
AF24-10-3648	1,000 lb (454 kg)	36" w x 48" h (914 x 1,219 mm)	820 lb (372 kg)
AF24-10-4848		48" w x 48" h (1,219 x 1,219 mm)	890 lb (404 kg)
AF24-10-4856		48" w x 56" h (1,219 x 1,422 mm)	935 lb (424 kg)
AF24-10-4860		48" w x 60" h (1,219 x 1,524 mm)	960 lb (435 kg)
<b>AF24-20 SERIES</b>			
AF24-20-3648	2,000 lb (907 kg)	36" w x 48" h (914 x 1,219 mm)	855 lb (388 kg)
AF24-20-4848		48" w x 48" h (1,219 x 1,219 mm)	915 lb (415 kg)
AF24-20-4856		48" w x 56" h (1,219 x 1,422 mm)	955 lb (433 kg)
AF24-20-4860		48" w x 60" h (1,219 x 1,524 mm)	1,040 lb (472 kg)
<b>AF24-40 SERIES</b>			
AF24-40-3648	4,000 lb (1,814 kg)	36" w x 48" h (914 x 1,219 mm)	1,000 lb (454 kg)
AF24-40-4848		48" w x 48" h (1,219 x 1,219 mm)	1,040 lb (472 kg)
AF24-40-4856		48" w x 56" h (1,219 x 1,422 mm)	1,115 lb (506 kg)
AF24-40-4860		48" w x 60" h (1,219 x 1,524 mm)	1,135 lb (515 kg)

# Hydraulic Tilters


Blue Giant Hydraulic Tilters come with a standard 8" or 12" (203 x 305 mm) lowered height depending on the tilt angle, and a standard base and platform of 36" x 48" (914 x 1,219 mm) (maximum platform size available is 48" x 60"). They also have an easily accessible internal power unit, as well as lifetime lubricated bushings at all pivot points. Oversized and custom sizes are available as well.

## FEATURES

- 8" lip standard
- Easily accessible internal power units
- Heavy-duty cylinders
- Lifetime lubricated bearings
- Standard hand controls

## OPTIONS

- Accordion skirts
- Conveyor
- Customized lips
- External power unit
- Floor stands
- Foot pedal control
- Oversized platform
- PLC controlled
- Portability package
- Travel limit switch

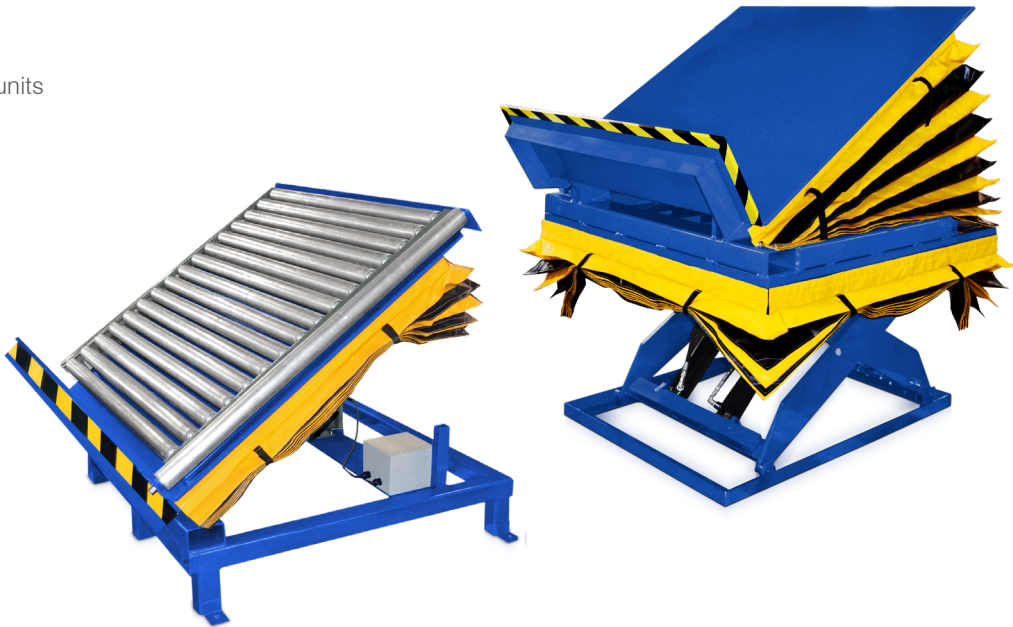

## SPECIFICATIONS

Model Number	Tilt Capacity	Lowered Height	Platform Size	Standard Motor	Weight
<b>ETT30 SERIES – 30° STANDARD TILT</b>					
ETT30-20	2,000 lb (907 kg)	8" (203 mm)	36" x 48" (914 x 1,219 mm) up to 48" x 60" (1,219 x 1,524 mm)	1 HP	630 lb (286 kg)
ETT30-40	4,000 lb (1,814 kg)				650 lb (295 kg)
ETT30-60	6,000 lb (2,721 kg)			2 HP	690 lb (313 kg)
<b>ETT45 SERIES – 45° STANDARD TILT</b>					
ETT45-20	2,000 lb (907 kg)	8" (203 mm)	36" x 48" (914 x 1,219 mm) up to 48" x 60" (1,219 x 1,524 mm)	1 HP	630 lb (286 kg)
ETT45-40	4,000 lb (1,814 kg)				650 lb (295 kg)
ETT45-60	6,000 lb (2,721 kg)			2 HP	690 lb (313 kg)
<b>ETT90 SERIES – 90° STANDARD TILT</b>					
ETT90-20	2,000 lb (907 kg)	12" (305 mm)	36" x 48" (914 x 1,219 mm) up to 48" x 60" (1,219 x 1,524 mm)	1 HP	630 lb (286 kg)
ETT90-40	4,000 lb (1,814 kg)				650 lb (295 kg)
ETT90-60	6,000 lb (2,721 kg)			2 HP	690 lb (313 kg)

# Wide Base Hydraulic Tilters

Blue Giant Wide Base Hydraulic Tilters are manufactured with the same specifications as the standard except the 90° standard tilt has a 12" (305 mm) lowered height, 60" x 60" (1,524 x 1,524 mm) standard base and platform, and 120" x 120" (3,048 x 3,048 mm) maximum platform. Oversized and custom sizes are also available.

## FEATURES

- 8" lip standard
- Easily accessible internal power units
- Heavy-duty cylinders
- Lifetime lubricated bearings
- Standard hand controls

## OPTIONS

- Accordion skirts
- Conveyor
- Customized lips
- External power unit
- Foot pedal control
- Oversized platform
- PLC controlled
- Portability package
- Travel limit switch



NOTE: custom lip shown

## SPECIFICATIONS

Model Number	Tilt Capacity	Standard Platform	Maximum Platform	Standard Motor	Weight
<b>WBETT45 SERIES – 45° STANDARD TILT</b>					
WBETT45-20	2,000 lb (907 kg)	60 x 60" (1,524 x 1,524 mm)	96 x 96" (2,438 x 2,438 mm)	1 HP	690 lb (313 kg)
WBETT45-40	4,000 lb (1,814 kg)				720 lb (327 kg)
WBETT45-60	6,000 lb (2,721 kg)			2 HP	750 lb (340 kg)
<b>WBETT60 SERIES – 60° STANDARD TILT</b>					
WBETT60-20	2,000 lb (907 kg)	60 x 60" (1,524 x 1,524 mm)	96 x 96" (2,438 x 2,438 mm)	1 HP	690 lb (313 kg)
WBETT60-40	4,000 lb (1,814 kg)				720 lb (327 kg)
WBETT60-60	6,000 lb (2,721 kg)			2 HP	750 lb (340 kg)
<b>WBETT90 SERIES – 90° STANDARD TILT</b>					
WBETT90-20	2,000 lb (907 kg)	60 x 60" (1,524 x 1,524 mm)	96 x 96" (2,438 x 2,438 mm)	1 HP	690 lb (313 kg)
WBETT90-40	4,000 lb (1,814 kg)				720 lb (327 kg)
WBETT90-60	6,000 lb (2,721 kg)			2 HP	750 lb (340 kg)

# Upenders

Blue Giant manufactures a complete line of Hydraulic Upenders to accommodate most industrial needs. Our 90° Upenders are ideal for the safe re-positioning of pallet loads and odd shaped objects such as rolls or coils. Conveyors and V-Cradles can be mounted to the platform to assist with pallet, crate, and roll or coil positioning.

## FEATURES

- 0° to 90° tilt angle
- Heavy-duty cylinders
- Standard hand control for lowering / raising tilt

## OPTIONS

- Accordion skirts
- Foot pedal control
- Oversized platforms
- PLC controlled
- Remote power units
- Roller conveyors
- V-Cradles
- Custom sizes available



## SPECIFICATIONS

Model Number	Load Capacity	Lowered Height	Weight
<b>HUE SERIES – 90° TILT</b>			
HUE-20-90	2,000 lb (907 kg)	12"	1,500 lb (680 kg)
HUE-40-90	4,000 lb (1,814 kg)		1,600 lb (726 kg)
HUE-60-90	6,000 lb (2,721 kg)		1,700 lb (771 kg)

**Upper Platform:** 24" width x 36" length (609 x 914 mm) to 72" width x 96" length (1,829 x 2,438 mm)

**Lower Platform:** 24" width x 36" length (609 x 914 mm) to 72" width x 96" length (1,829 x 2,438 mm)

# Pneumatic Tilt

Blue Giant's complete line of heavy-duty industrial Pneumatic Tilt Tables are 100% air actuated and can be used anywhere plant air is available (requires 80 PSI at 15 CFM air supply). These units are ideal in applications where hydraulic equipment (oils and fluids) is prohibited. These units require less maintenance than electric hydraulic units with no direct electrical connections, control boxes, or hydraulic cylinders. The Pneumatic Tilt Tables feature 30° and 45° of tilt and 8" (203 mm) lowered height.

## FEATURES

- 30° and 45° of tilt
- 8" (203 mm) lowered height
- Hand control pendant station
- Heavy-duty industrial air spring
- Integral flip up maintenance safety bars
- Lifetime lubricated bushings



## OPTIONS

- Accordion skirts
- Conveyor
- Custom platforms
- Floor stands
- Foot pedal control

## SPECIFICATIONS

Model Number	Load Capacity	Platform Size	Weight
<b>AFT10 SERIES</b>			
AFT10-3648	1,000 lb (454 kg)	36" x 48" (914 x 1,219 mm)	640 lb (290 kg)
AFT10-4848		48" x 48" (1,219 x 1,219 mm)	700 lb (318 kg)
AFT10-4856		48" x 56" (1,219 x 1,422 mm)	750 lb (340 kg)
AFT10-4860		48" x 60" (1,219 x 1,524 mm)	770 lb (349 kg)
<b>AFT20 SERIES</b>			
AFT20-3648	2,000 lb (907 kg)	36" x 48" (914 x 1,219 mm)	690 lb (313 kg)
AFT20-4848		48" x 48" (1,219 x 1,219 mm)	770 lb (349 kg)
AFT20-4856		48" x 56" (1,219 x 1,422 mm)	835 lb (379 kg)
AFT20-4860		48" x 60" (1,219 x 1,524 mm)	855 lb (388 kg)
<b>AFT40 SERIES</b>			
AFT40-3648	4,000 lb (1,814 kg)	36" x 48" (914 x 1,219 mm)	795 lb (361 kg)
AFT40-4856		48" x 56" (1,219 x 1,422 mm)	850 lb (386 kg)
AFT40-4860		48" x 60" (1,219 x 1,524 mm)	880 lb (399 kg)

## Turn Tables

The Blue Giant Manual Turn Lift Table is designed to enhance operator ergonomics and productivity, by reducing the necessity to reach across, or walk around a load. These units are ideal in applications that require pallet loading or pallet unloading. 90° to 180° detents can be added to increase operator efficiency.

### FEATURES

- 1/2" (13 mm) thick platform
- 4,000 lb (1,814 kg) load capacity
- Heavy-duty construction
- Lifetime lubricated kingpin bearings
- Low profile

### OPTIONS

- 90° or 180° detents
- Conveyor mounted to top
- Floor / stand / scissor lift mounted



### SPECIFICATIONS

Model Number	Load Capacity	Platform Size	Lowered Height	Weight
<b>MANUAL TURN TABLES</b>				
MTT40-2424	4,000 lb (1,814 kg)	24" x 24" (610 x 610 mm)	3" (76 mm)	200 lb (91 kg)
MTT40-2436		24" x 36" (610 x 914 mm)		250 lb (113 kg)
MTT40-3636		36" x 36" (914 x 914 mm)		300 lb (136 kg)
MTT40-3648		36" x 48" (914 x 1,219 mm)		350 lb (159 kg)
MTT40-4848		48" x 48" (1,219 x 1,219 mm)		450 lb (204 kg)
MTT40-4860		48" x 60" (1,219 x 1,524 mm)		525 lb (238 kg)
MTT40-6060		60" x 60" (1,524 x 1,524 mm)		625 lb (283 kg)

**BLUE GIANT**<sup>®</sup>  
BLUE GIANT EQUIPMENT CORPORATION

**Corporate** 410 Admiral Blvd  
Mississauga, ON, Canada L5T 2N6  
t 905.457.3900 f 905.457.2313

**USA** 6350 Burnt Poplar Road  
Greensboro, NC 27409  
[www.bluegiant.com](http://www.bluegiant.com)

Blue Giant offers a full line of dock levelers, dock safety equipment, seals and shelters, accessories, ergonomic and scissor lift equipment and industrial trucks. Concurrent with our continuing product improvement program, specifications are subject to change without notice. Please contact Blue Giant for latest information. Some features illustrated may be optional in certain market areas.